
ARS
Cut Above the Rest

Cordless Rechargeable
Pruning Shears

EP series
ET Long Reach series

Powerful yet gentle on trees,
Leaving a clean cut surface

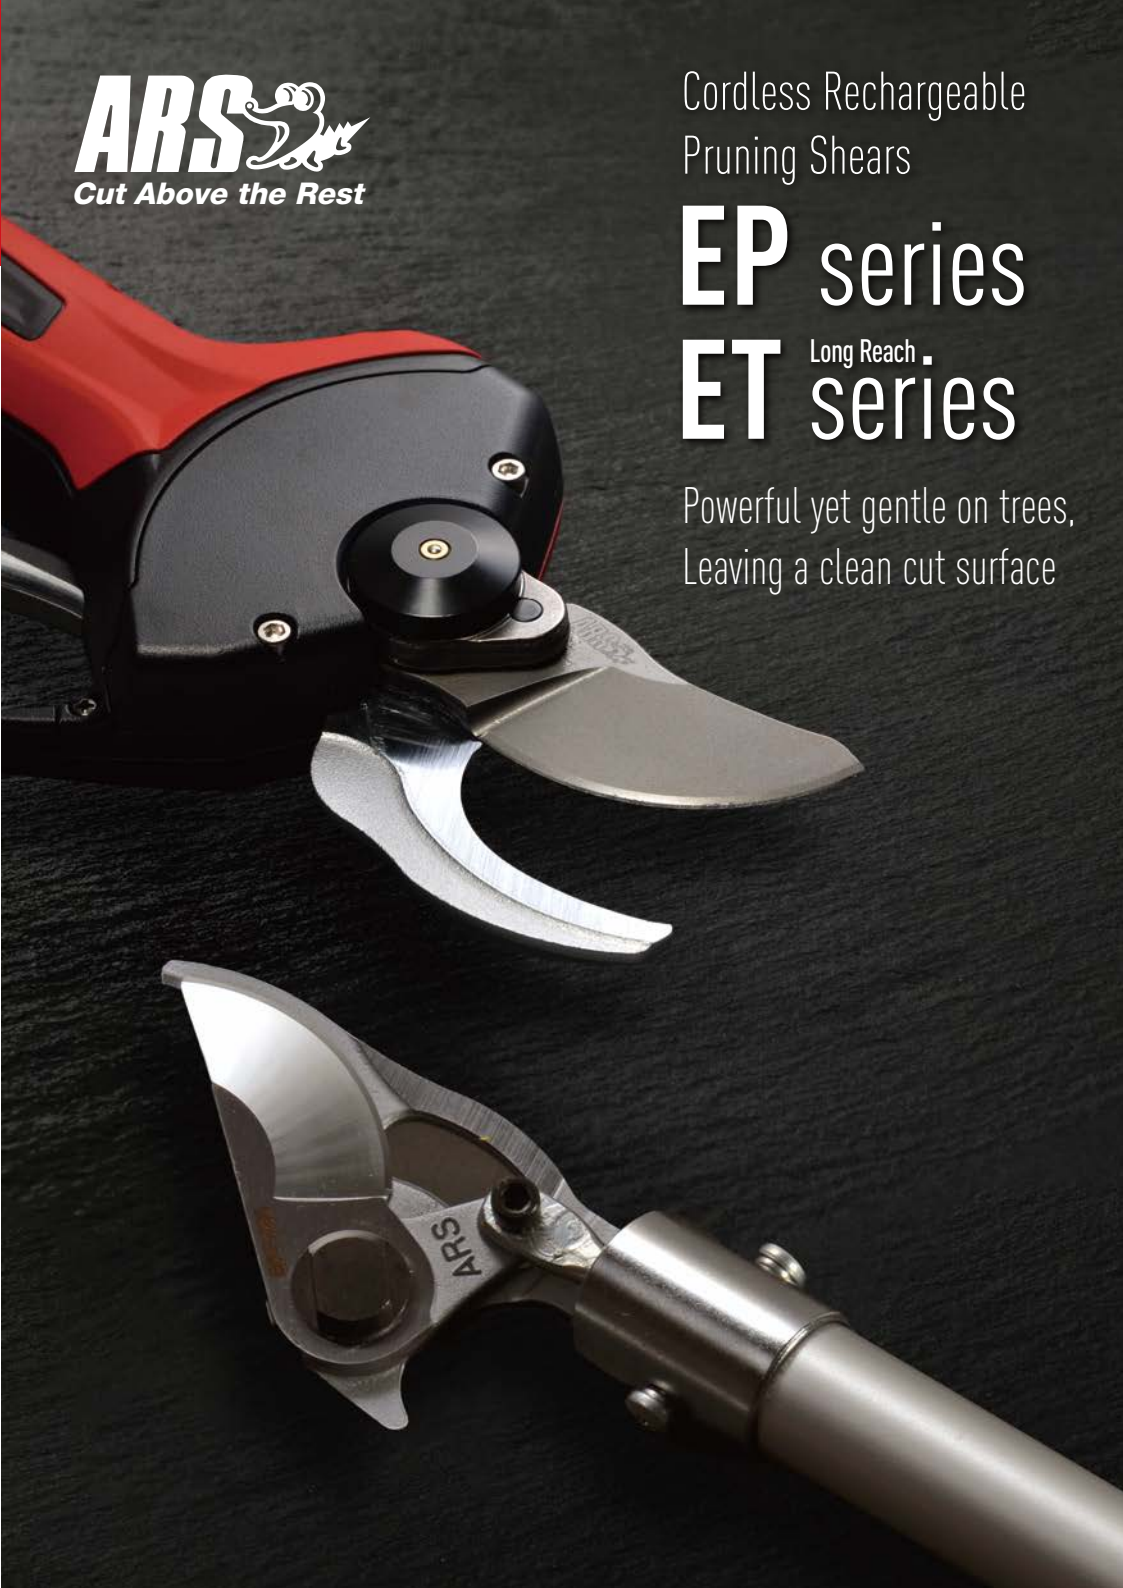

MADE IN JAPAN

Exceptional blades with our commitment to quality

- High-quality special steel
- Optimized design: Years of expertise in designing the cutting and counter blades.
- Anti-rust and resin: Hard-chrome plating applied.




ARS Original Blades Grind for branch slip prevention

Specially designed blades provide a better grip on branches. The sharp blade edge grips branches and cuts thick branches smoothly.


Outstanding Sharpness Delivers Clean, Smooth Cuts.

Reducing Plant Tissue Damage and Helping Maintain Plant Health.

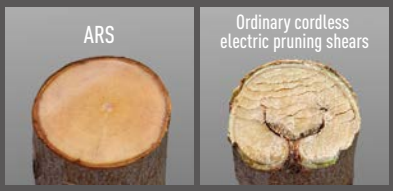

Three-Stage Process for Durability

Reduces Chipping

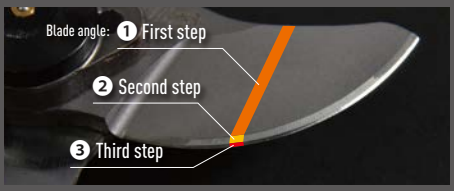

Safe, Reliable, Easy to Use

- With Heavy-Duty Carrying Case
- Includes 2 Batteries for Reliable Operation



With A Special Holster*1


Designed to be durable and resistant to damage.

*1: Not included with EP-719.



Adjustable Blade Opening for Efficient Pruning*2

Optimized for both thick and thin branches.

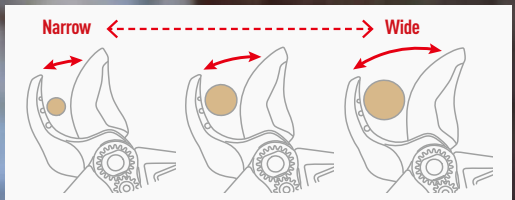

*2: Diagram shown: EP-721 (Stepless), EP-720 / EP-719 (2-step adjustment)

Lightweight, Balanced Design for Extended Use

Ergonomic non-slip rubber grip

Precise Control

Synchronized trigger activation: Moves in sync with your finger movement.

Max. Cutting Capacity*3 (Green Wood / Actual Size / Guide)

*3: Capacity may vary depending on wood type. Image for illustration purposes only.



Cordless Rechargeable Pruning Shears EP series

POWERFUL

EP-721

Supreme performance for every cut

40 mm MAX. | Blade Opening: Stepless | 1 kg Approx. | Fluororesin Coating | Hard Chrome Plating | Special Holster

- Max. Cutting Capacity: 40 mm
- Weight: 1005 g
- Stepless Blade Opening Adjustment
- Dual-Layer Blade Coating (Fluororesin Coating + Hard-Chrome Plating)
- Hard Carry Case
- 2 Batteries
- Holster
- Anti-Drop Safety Strap



2way Anti-Drop Safety Strap





MADE IN JAPAN BLADE



BALANCED

EP-720

Powerful yet gentle on trees, leaving a clean cut surface

30 mm MAX. | Blade Opening: 2-step | 0.9 kg Approx. | Fluororesin Coating | Hard Chrome Plating | Special Holster

- Max. Cutting Capacity: 30 mm
- Weight: 950 g
- 2-step Blade Opening Adjustment
- Dual-Layer Blade Coating (Fluororesin Coating + Hard-Chrome Plating)
- Hard Carry Case
- 2 Batteries
- Holster
- Optional Extension Attachment for Pole Pruner ET-series





MADE IN JAPAN BLADE

OPTION POLE PRUNER ATTACHMENT



LIGHT TYPE

EP-719

Light Weight & Easy Operation for everyone

25 mm MAX. | Blade Opening: 2-step | 0.9 kg Approx. | Hard Chrome Plating

- Max. Cutting Capacity: 25 mm
- Weight: 920 g
- 2-step Blade Opening Adjustment
- Hard-Chrome Plating
- Hard Carry Case
- 2 Batteries





MADE IN JAPAN BLADE



Long Reach Pruners Extension Attachment

FOR HIGHER PLACES

ET Series

20 mm MAX.


Hard Chrome Plating



- Max. Cutting Capacity: 20 mm
- 270° Rotatable Pole
- 15° Cutting Head Angle
- 2-step Blade Opening Adjustment
- Hard-Chrome Plating
- 2 Batteries


15° Angled Head

Easy to target and cut along the branch



270° Rotatable Pole

Rotatable pole allows to target branches at your best angle




Available in Multiple Pole Lengths

ET-720-2.3
2.3m

ET-720-1.7
1.7m

ET-720-1.2
1.2m

ET-720-0.9
0.9m

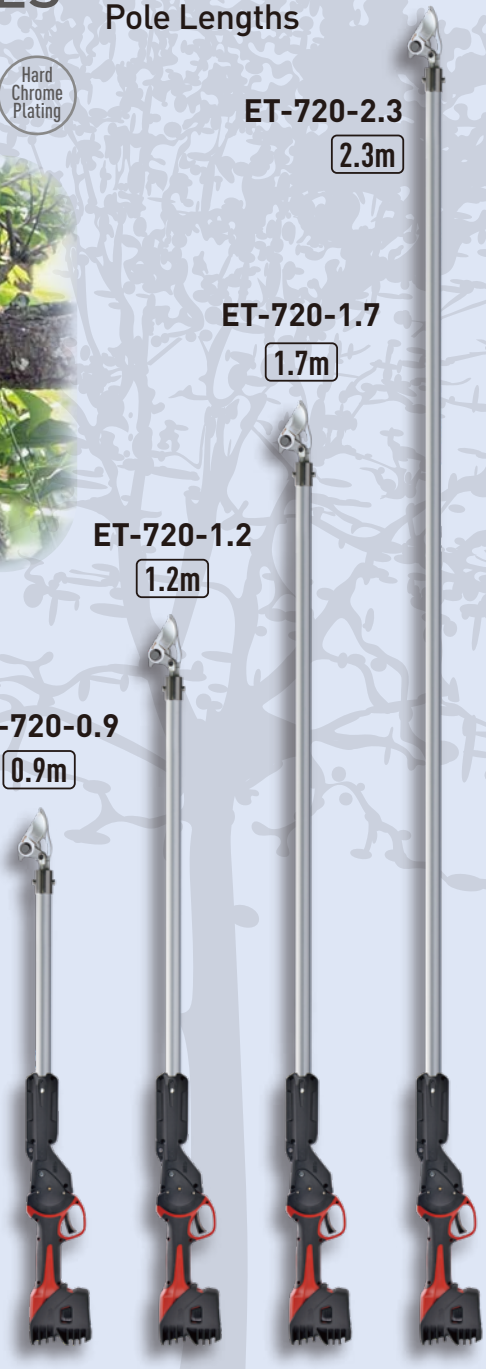

Long Reach Pruners

Compatible Attachment
For EP-720 Only

Specifications

Product	Cordless Rechargeable Pruning Shears			Cordless Rechargeable Long Reach Pruners
Product Code / No.	EP-721	EP-720	EP-719	ET-720-0.9 / 1.2 / 1.7 / 2.3
Overall Length (mm)	290	286	295	870 / 1170 / 1670 / 2270
Blade Length (mm)	52	52	52	52
Weight (g) (including 1 battery)	1005	925	920	1930 / 2030 / 2165 / 2330
Max. Cutting Diameter (green wood)	40	30	25	Up to 20 mm in diameter
Voltage	DC 14.4V	DC 14.4V	DC 10.8V	DC 14.4 V
Long Reach Attachment	N/A	Yes	N/A	—
Battery Capacity	2.5 Ah			
Standard Charging Time (Lithium-Ion Battery)	1-2 hours (per battery)			
Continuous Usage Time	3-4 hours (Actual time may vary depending on usage)			
Charging Voltage	AC100 V-240 V 50/60 Hz			

DISTRIBUTED BY



ARS CORPORATION SINCE 1876 JAPAN

https://www.arscorporation.jp

Established In 1876
476-3 Handaiji-Cho, Naka-ku, Sakai City,
599-8267, Osaka, Japan

Specifications are subject to change without notice in line with our policy of constant product improvement. Illustration may vary from actual product design.

Published in 06.2026